


**UC 200 HT2**

Rolamento esférico com fixação por parafusos  
 Serviço Normal  
 Alta Temperatura

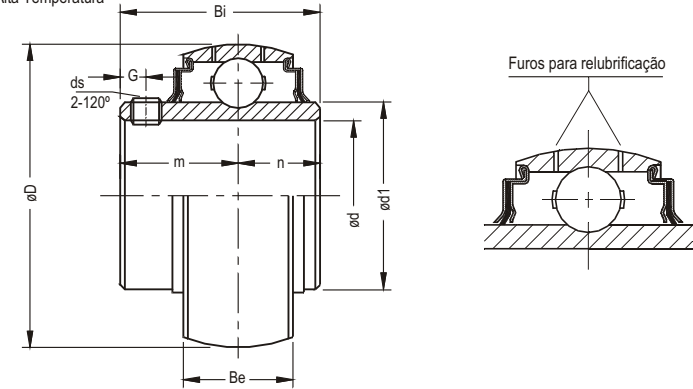

Ø eixo mm pol	Rolamento	Dimensão nominal (mm)							ds (mm) (UNF)	Cargas (Kgf)		Peso (Kg)	Rotação máxima (rpm) ajuste h7
		D	d1	Bi	n	m	Be	G		dinâmica Cr	estática Cor		
3/4 20	UC 204-12 V22 HT2 UC 204 V22 HT2	47,0	29,0	31,0	12,7	18,3	16,0	5,0	M6x1 1/4-28	1310	680	0,20	3800
25 1	UC 205 V22 HT2 UC 205-16 V22 HT2	52,0	34,0	34,0	14,3	19,7	17,0	5,5	M6x1 1/4-28	1430	800	0,20	3000
30	UC 206 V22 HT2	62,0	40,5	38,1	15,9	22,2	19,0	6,0	M6x1	2000	1140	0,30	2500
35	UC 207 V22 HT2	72,0	48,0	42,9	17,5	25,4	20,0	6,5	M8x1	2640	1550	0,50	2100
40	UC 208 V22 HT2	80,0	53,0	49,2	19,0	30,2	21,0	8,0	M8x1	2990	1860	0,65	1900
1-3/4 45	UC 209-28 V22 HT2 UC 209 V22 HT2	85,0	57,0	49,2	19,0	30,2	22,0	8,0	M8x1 5/16-24	3350	2120	0,70	1700
50	UC 210 V22 HT2	90,0	62,0	51,6	19,0	32,6	23,0	9,0	M10x1,25	3600	2370	0,80	1500
2 55	UC 211-32 V22 HT2 UC 211 V22 HT2	100,0	69,0	55,6	22,2	33,4	25,0	9,0	M10x1,25 3/8-24	4400	2980	1,15	1400
60	UC 212 V22 HT2	110,0	75,0	65,1	25,4	39,7	27,0	10,5	M10x1,25	5350	3350	1,55	1300
65	UC 213 V22 HT2	120,0	82,0	65,1	25,4	39,7	28,0	12,0	M12x1,25	5850	4080	1,75	1200
70	UC 214 V22 HT2	125,0	86,5	74,6	30,2	44,4	30,0	12,0	M12x1,25	6350	4590	2,00	1100
2-15/16 75	UC 215-47 V22 HT2 UC 215 V22 HT2	130,0	91,5	77,8	33,3	44,5	30,0	12,0	M12x1,25 7/16-20	6750	5050	2,20	1000
80	UC 216 V22 HT2	140,0	98,0	82,6	33,3	49,3	33,0	14,0	M12x1,25	7400	5530	2,80	940
90	UC 218 V22 HT2	160,0	111,0	96,0	39,7	56,3	37,0	14,0	M12x1,25	9750	7300	4,50	830